

# Xavierre 1, 2, 3, and 4 Light Vanity Strip

VS2210\_ I.1

## GENERATION LIGHTING WALL

### GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**  
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
**Use minimum 90°C supply conductors.**

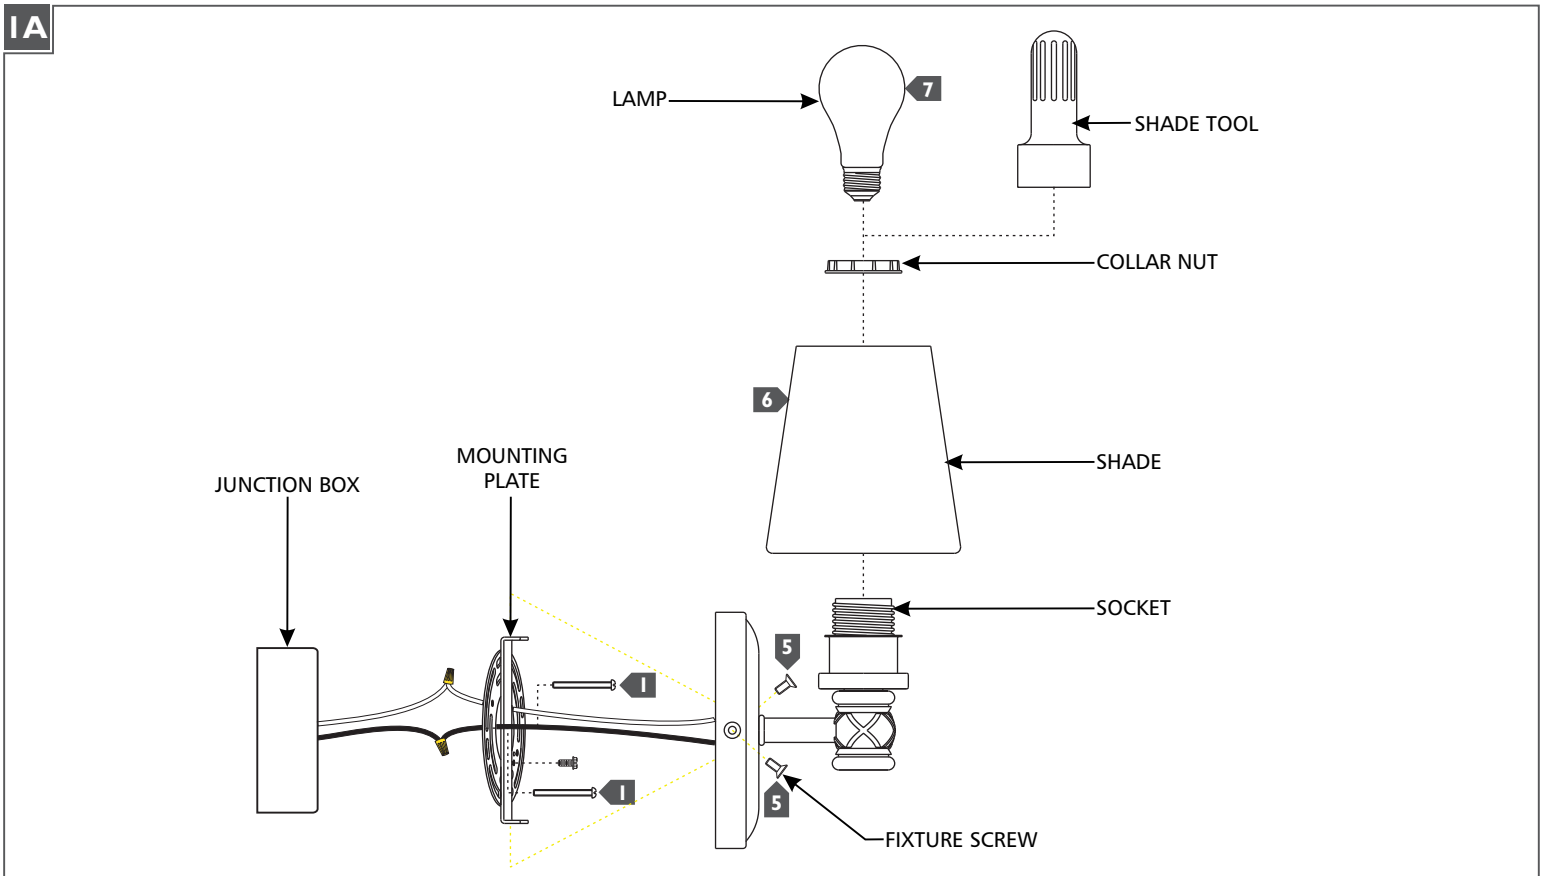

- 1** Secure the mounting plate to the junction box.
- 2** Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 3** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire to the hot power line wire with a wire nut.
- 5** Mount the fixture base onto the mounting plate and secure it with the fixture screws.
- 6** Place the shade over the socket and secure it in place by screwing the collar nut onto the socket using the shade tool. Repeat for multiple shades.
- 7** Screw the lamp(s) into the socket(s). Refer to the label on the lamp socket for Max Wattage information.

GENERATION LIGHTING  
 7400 Linder Ave., Skokie, IL 60077  
 T 847.410.4400 | F 847.410.4500  
 www.generationlighting.com